





Heat pump ERP Test Report	
Report Number	4394367.50
Tested by (name + signature)	Elvis Chen 
Approved by (name + signature)	Jacky Zhang 
Date of issue	2022-09-08
Total number of pages	19 Pages
Testing Laboratory	DEKRA Testing and Certification (Shanghai) Ltd., Guangzhou branch
Address	Block 5, No.3, Qiyun Road, Huangpu District, Guangzhou, Guangdong, China
Applicant's name	Guangzhou Mango Energy Technology Co., Ltd
Address	1F, Building C Haihe Industrial Zone, No.10 Dongsheng Road Xinya Street, Huadou District, Guangzhou City, Guangdong Province, China
Test specification:	
Standard	EN 14825:2018, EN 14511-1/2/3/4:2018
Test procedure	(EU) No 811/2013, (EU) No 813/2013, EU 2017/254, EU 2016/2282
Non-standard test method	N/A
Test Report Form No.	EN 14825 heat pump air to water
Test Report Form(s) Originator ...	DEKRA Guangzhou
Test item description	Heat pump
Trade Mark	
Manufacturer	Same as applicant
Factory	Same as applicant
Model/Type reference	MGSDC-080IIC
Ratings	380 V 3N~, 50 Hz, R32/4000g, see rating label


Summary of testing:
Tests performed (Test items): Heating capacity
Testing location: Foshan QiCe Testing Technical Service Co., Ltd. 1/F, of No.2 Jusheng Road, Ronggui Hongxing Residential Committee, Shunde, Foshan, Guangdong, China

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

	
DC Inverter Air - Water Heat Pump	
Model	MGSDC-080IIC
Power Supply	380V~50Hz/3Ph
Heating(air-10°C/water35°C)	
Heating Capacity	21.0kW
Rated Input Power	7.42kW
COP	2.83W/W
HOT water(air-10°C/water55°C)	
Heating Capacity	20.0kW
Rated Input Power	9.48kW
COP	2.11W/W
Cooling(air+35°C/water7°C)	
Cooling Capacity	20.0kW
Rated Input Power	7.25kW
EER	2.76W/W
Max.Input Power	8.0kW
Max.Current	12.12A
Max.Pressure	4. 2Mpa
Min.Pressure	2. 1Mpa
Refrigerant	R32/4000g
Water flow	≥3. 40m³/h
Water pressure drop	≤45kpa
Water pipe size	DN 32
Water Proof Class	IPX4
Noise	≤59.0dB (A)
Size(WxDxH)	1175x400x1482 (mm)
Net Weight	165.0kg

Rating label

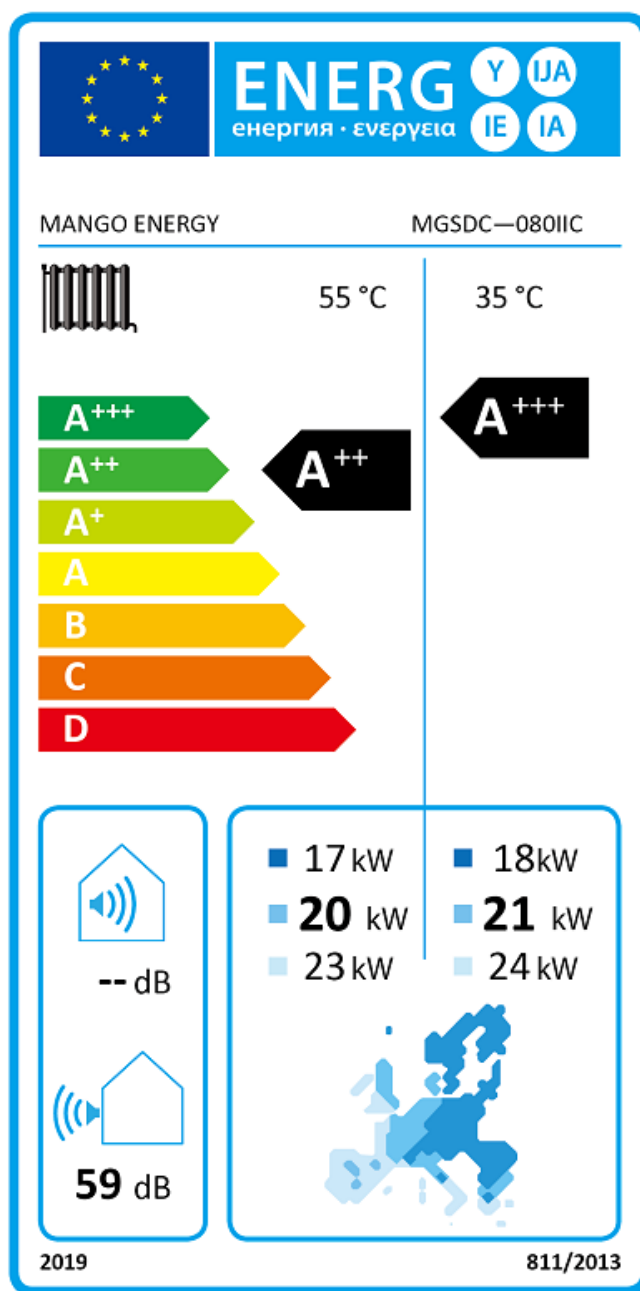

Energy label

Test item particulars :	
Classification of installation and use	Fixed appliance
Supply Connection	Non-detachable power supply cord with plug

Possible test case verdicts:	
- test case does not apply to the test object..... :	N/A
- test object does meet the requirement	P (Pass)
- test object does not meet the requirement	F (Fail)
Testing :	
Date of receipt of test item	2022-08-26
Date (s) of performance of tests	2022-08-26 to 2022-09-02

General remarks:	
The test results presented in this report relate only to the object tested.	
This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.	
"(see Enclosure #)" refers to additional information appended to the report.	
"(see appended table)" refers to a table appended to the report.	
Throughout this report, a dot is used as the decimal separator.	
The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to calculate the uncertainty associated with the measurement result.	
The test results presented in this report relate only to the object tested.	
The information provided by the customer in this report may affect the validity of the results, the test lab is not responsible for it.	
This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.	
This report is not used for social proof function in China market.	

General product information:	
Model number of Unit Under Test	MGSDC-080IIC
Power Supply	three-phase
Refrigerant	R32
Heat Source (Heating Mode)	air
Heat Sink	Water
Does this heat pump have a variable output compressor?	Yes
Type of compressor	inverter

Clause	(EU) No 813/2013 - Ecodesign requirements	Result - Remark	Verdict
1	REQUIREMENTS FOR SEASONAL SPACE HEATING ENERGY EFFICIENCY		-
(a)	From 26 September 2015 the seasonal space heating energy efficiency and useful efficiencies of heaters shall not fall below the following values:		-
	Fuel boiler space heaters with rated heat output ≤ 70 kW and fuel boiler combination heaters with rated heat output ≤ 70 kW, with the exception of type B1 boilers with rated heat output ≤ 10 kW and type B1 combination boilers with rated heat output ≤ 30 kW: The seasonal space heating energy efficiency shall not fall below 86 %.		N/A
	Type B1 boilers with rated heat output ≤ 10 kW and type B1 combination boilers with rated heat output ≤ 30 kW: The seasonal space heating energy efficiency shall not fall below 75 %.		N/A
	Fuel boiler space heaters with rated heat output > 70 kW and ≤ 400 kW and fuel boiler combination heaters with rated heat output > 70 kW and ≤ 400 kW: The useful efficiency at 100 % of the rated heat output shall not fall below 86 %, and the useful efficiency at 30 % of the rated heat output shall not fall below 94 %.		N/A
	Electric boiler space heaters and electric boiler combination heaters: The seasonal space heating energy efficiency shall not fall below 30 %.		N/A
	Cogeneration space heaters: The seasonal space heating energy efficiency shall not fall below 86 %.		N/A
	Heat pump space heaters and heat pump combination heaters, with the exception of low-temperature heat pumps: The seasonal space heating energy efficiency shall not fall below 100 %.		P
	Low-temperature heat pumps: The seasonal space heating energy efficiency shall not fall below 115 %.		N/A
(b)	From 26 September 2017 the seasonal space heating energy efficiency of electric boiler space heaters, electric boiler combination heaters, cogeneration space heaters, heat pump space heaters and heat pump combination heaters shall not fall below the following values:		-
	Electric boiler space heaters and electric boiler combination heaters: The seasonal space heating energy efficiency shall not fall below 36 %.		N/A
	Cogeneration space heaters: The seasonal space heating energy efficiency shall not fall below 100 %.		N/A
	Heat pump space heaters and heat pump combination heaters, with the exception of low-temperature		P

Clause	(EU) No 813/2013 - Ecodesign requirements	Result - Remark	Verdict																								
	heat pumps: The seasonal space heating energy efficiency shall not fall below 110 %.																										
	Low-temperature heat pumps: The seasonal space heating energy efficiency shall not fall below 125 %.		N/A																								
2	REQUIREMENTS FOR WATER HEATING ENERGY EFFICIENCY		-																								
(a)	<p>From 26 September 2015 the water heating energy efficiency of combination heaters shall not fall below the following values:</p> <table><tr><td>Declared load profile</td><td>3XS</td><td>XXS</td><td>XS</td><td>S</td><td>M</td><td>L</td><td>XL</td><td>XXL</td><td>3XL</td><td>4XL</td></tr><tr><td>Water heating energy efficiency</td><td>22 %</td><td>23 %</td><td>26 %</td><td>26 %</td><td>30 %</td><td>30 %</td><td>30 %</td><td>32 %</td><td>32 %</td><td>32 %</td></tr></table>	Declared load profile	3XS	XXS	XS	S	M	L	XL	XXL	3XL	4XL	Water heating energy efficiency	22 %	23 %	26 %	26 %	30 %	30 %	30 %	32 %	32 %	32 %		N/A		
Declared load profile	3XS	XXS	XS	S	M	L	XL	XXL	3XL	4XL																	
Water heating energy efficiency	22 %	23 %	26 %	26 %	30 %	30 %	30 %	32 %	32 %	32 %																	
(b)	<p>From 26 September 2017 the water heating energy efficiency of combination heaters shall not fall below the following values:</p> <table><tr><td>Declared load profile</td><td>3XS</td><td>XXS</td><td>XS</td><td>S</td><td>M</td><td>L</td><td>XL</td><td>XXL</td><td>3XL</td><td>4XL</td></tr><tr><td>Water heating energy efficiency</td><td>32 %</td><td>32 %</td><td>32 %</td><td>32 %</td><td>36 %</td><td>37 %</td><td>38 %</td><td>60 %</td><td>64 %</td><td>64 %</td></tr></table>	Declared load profile	3XS	XXS	XS	S	M	L	XL	XXL	3XL	4XL	Water heating energy efficiency	32 %	32 %	32 %	32 %	36 %	37 %	38 %	60 %	64 %	64 %		N/A		
Declared load profile	3XS	XXS	XS	S	M	L	XL	XXL	3XL	4XL																	
Water heating energy efficiency	32 %	32 %	32 %	32 %	36 %	37 %	38 %	60 %	64 %	64 %																	
3	REQUIREMENTS FOR SOUND POWER LEVEL		Not check																								
	<p>From 26 September 2015 the sound power level of heat pump space heaters and heat pump combination heaters shall not exceed the following values:</p> <table><tr><td colspan="2">Rated heat output ≤ 6 kW</td><td colspan="2">Rated heat output > 6 kW and ≤ 12 kW</td><td colspan="2">Rated heat output > 12 kW and ≤ 30 kW</td><td colspan="2">Rated heat output > 30 kW and ≤ 70 kW</td></tr><tr><td>Sound power level (L_{WA}), indoors</td><td>Sound power level (L_{WA}), outdoors</td><td>Sound power level (L_{WA}), indoors</td><td>Sound power level (L_{WA}), outdoors</td><td>Sound power level (L_{WA}), indoors</td><td>Sound power level (L_{WA}), outdoors</td><td>Sound power level (L_{WA}), indoors</td><td>Sound power level (L_{WA}), outdoors</td></tr><tr><td>60 dB</td><td>65 dB</td><td>65 dB</td><td>70 dB</td><td>70 dB</td><td>78 dB</td><td>80 dB</td><td>88 dB</td></tr></table>	Rated heat output ≤ 6 kW		Rated heat output > 6 kW and ≤ 12 kW		Rated heat output > 12 kW and ≤ 30 kW		Rated heat output > 30 kW and ≤ 70 kW		Sound power level (L_{WA}), indoors	Sound power level (L_{WA}), outdoors	Sound power level (L_{WA}), indoors	Sound power level (L_{WA}), outdoors	Sound power level (L_{WA}), indoors	Sound power level (L_{WA}), outdoors	Sound power level (L_{WA}), indoors	Sound power level (L_{WA}), outdoors	60 dB	65 dB	65 dB	70 dB	70 dB	78 dB	80 dB	88 dB		Not check
Rated heat output ≤ 6 kW		Rated heat output > 6 kW and ≤ 12 kW		Rated heat output > 12 kW and ≤ 30 kW		Rated heat output > 30 kW and ≤ 70 kW																					
Sound power level (L_{WA}), indoors	Sound power level (L_{WA}), outdoors	Sound power level (L_{WA}), indoors	Sound power level (L_{WA}), outdoors	Sound power level (L_{WA}), indoors	Sound power level (L_{WA}), outdoors	Sound power level (L_{WA}), indoors	Sound power level (L_{WA}), outdoors																				
60 dB	65 dB	65 dB	70 dB	70 dB	78 dB	80 dB	88 dB																				
4	REQUIREMENTS FOR EMISSIONS OF NITROGEN OXIDES		N/A																								
(a)	From 26 September 2018 emissions of nitrogen oxides, expressed in nitrogen dioxide, of heaters shall not exceed the following values:		N/A																								
	fuel boiler space heaters and fuel boiler combination heaters using gaseous fuels: 56 mg/kWh fuel input in terms of GCV;		N/A																								
	fuel boiler space heaters and fuel boiler combination heaters using liquid fuels: 120 mg/kWh fuel input in terms of GCV;		N/A																								
	cogeneration space heaters equipped with external combustion using gaseous fuels: 70 mg/kWh fuel input in terms of GCV;		N/A																								
	cogeneration space heaters equipped with external combustion using liquid fuels: 120 mg/kWh fuel input in terms of GCV;		N/A																								
	cogeneration space heaters equipped with an internal combustion engine using gaseous fuels: 240 mg/kWh fuel input in terms of GCV;		N/A																								

Clause	(EU) No 813/2013 - Ecodesign requirements	Result - Remark	Verdict
	cogeneration space heaters equipped with an internal combustion engine using liquid fuels: 420 mg/kWh fuel input in terms of GCV;		N/A
	heat pump space heaters and heat pump combination heaters equipped with external combustion using gaseous fuels: 70 mg/kWh fuel input in terms of GCV;		N/A
	heat pump space heaters and heat pump combination heaters equipped with external combustion using liquid fuels: 120 mg/kWh fuel input in terms of GCV;		N/A
	heat pump space heaters and heat pump combination heaters equipped with an internal combustion engine using gaseous fuels: 240 mg/kWh fuel input in terms of GCV;		N/A
	heat pump space heaters and heat pump combination heaters equipped with an internal combustion engine using liquid fuels: 420 mg/kWh fuel input in terms of GCV.		N/A
5	REQUIREMENTS FOR PRODUCT INFORMATION		-
	From 26 September 2015 the following product information on heaters shall be provided:		-
(a)	the instruction manuals for installers and end-users, and free access websites of manufacturers, their authorised representatives and importers shall contain the following elements:		-
	for boiler space heaters, boiler combination heaters and cogeneration space heaters, the technical parameters set out in Table 1, measured and calculated in accordance with Annex III;		N/A
	for heat pump space heaters and heat pump combination heaters, the technical parameters set out in Table 2, measured and calculated in accordance with Annex III;		P
	any specific precautions that shall be taken when the heater is assembled, installed or maintained		P
	for type B1 boilers and type B1 combination boilers, their characteristics and the following standard text: 'This natural draught boiler is intended to be connected only to a flue shared between multiple dwellings in existing buildings that evacuates the residues of combustion to the outside of the room containing the boiler. It draws the combustion air directly from the room and incorporates a draught diverter. Due to lower efficiency, any other use of this boiler shall be avoided and would result in higher energy consumption and higher operating costs.		N/A
	for heat generators designed for heaters, and heater housings to be equipped with such heat generators, their characteristics, the requirements for assembly, to ensure compliance with the ecodesign requirements for heaters and, where appropriate, the list of combinations recommended by the manufacturer		N/A
	information relevant for disassembly, recycling and/or disposal at end-of-life;		Not check

Clause	(EU) No 813/2013 - Ecodesign requirements	Result - Remark	Verdict
(b)	the technical documentation for the purposes of conformity assessment pursuant to Article 4 shall contain the following elements		-
	the elements specified in point (a)		P
	for heat pump space heaters and heat pump combination heaters where the information relating to a specific model comprising a combination of indoor and outdoor units has been obtained by calculation on the basis of design and/or extrapolation from other combinations, the details of such calculations and/or extrapolations, and of any tests undertaken to verify the accuracy of the calculations, including details of the mathematical model for calculating the performance of such combinations and details of the measurements taken to verify this model		P
(c)	the following information shall be durably marked on the heater		-
	if applicable, 'type B1 boiler' or 'type B1 combination boiler'		N/A
	for cogeneration space heaters, the electrical capacity.		N/A

(EU) No 813/2013 - Ecodesign requirements							
Table 2: Information requirements for heat pump space heaters and heat pump combination heaters							
Model(s)				MGSDC-080IIC			
Air-to-water heat pump				Yes			
Water-to-water heat pump:				No			
Brine-to-water heat pump				No			
Low-temperature heat pump				No			
Equipped with a supplementary heater				No			
Heat pump combination heater				No			
Parameters shall be declared for medium-temperature application, except for low-temperature heat pumps. For low- temperature heat pumps, parameters shall be declared for low-temperature application							
Parameters shall be declared for average climate conditions							
medium-temperature		Y		Average(mandatory)		Y	
Low-temperature		N		Wraper (if designated)		N	
				Colder (if designated)		N	
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output(*)	Prated	20	kW	Seasonal space heating energy efficiency	η_s	131	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T j			
T j = – 7 °C	Pdh	18.6	kW	T j = – 7 °C	COPd	2.5	—
T j = 2 °C	Pdh	11.1	kW	T j = 2 °C	COPd	3.5	—
T j = 7 °C	Pdh	8.4	kW	T j = 7 °C	COPd	4.9	—
T j = 12 °C	Pdh	7.8	kW	T j = 12 °C	COPd	7.3	—
T j = bivalent temperature	Pdh	19.9	kW	T j = bivalent temperature	COPd	2.1	—
T j = operating limit	Pdh	18.6	kW	T j = operating limit	COPd	2.5	—
For air-to-water heat pumps: T j = – 15 °C (if TOL < – 20 °C)	Pdh	N/A	kW	For air-to-water heat pumps: T j = – 15 °C (if TOL < – 20 °C)	COPd or PERd	N/A	-
Bivalent temperature	T biv	-7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	Pcyc	N/A	kW	Cycling interval efficiency	COPcyc or PERcyc	N/A	%
Degradation co-efficient (**)	Cdh	0.9	-	Heating water operating limit temperature	WTOL	N/A	°C
Power consumption in modes other than active mode				Supplementary heater			

(EU) No 813/2013 - Ecodesign requirements							
Off mode	P _{OFF}	0.009	kW	Rated heat output (*)	P _{sup}	0.2	kW
Thermostat-off mode	P _{TO}	0.049	kW				
Standby mode	P _{SB}	0.009	kW	Type of energy input	Electric		
Crankcase heater mode	P _{CK}	0.050	kW				
Other items							
Capacity control	-	variable		For air-to-water heat pumps: Rated air flow rate, outdoors	-	2.15	m³/h
Sound power level, indoors/ outdoors	L _{WA}	-/59	dB	For water-/brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	N/A	m³/h
Emissions of nitrogen oxides	NO _x	N/A	mg/kWh				
For heat pump combination heater:							
Declared load profile	N/A			Water heating energy efficiency	η _{wh}	N/A	%
Daily electricity consumption	Q _{elec}	N/A	kWh		Q _{fuel}	N/A	kWh
Contact details	Guangzhou Mango Energy Technology Co., Ltd 1F,Building C Haihe Industrial Zone,No.10 Dongsheng Road Xinya Street,Huadou District,Guangzhou City,Guangdong Province ,China						
(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).							
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.							

Clause	Energy efficiency classes	Result - Remark	Verdict																						
1	SEASONAL SPACE HEATING ENERGY EFFICIENCY CLASSES		-																						
	<p>The seasonal space heating energy efficiency class of a heater, with the exception of low-temperature heat pumps and heat pump space heaters for low-temperature application, shall be determined on the basis of its seasonal space heating energy efficiency as set out in Table 1.</p> <p>Table 1</p> <p>Seasonal space heating energy efficiency classes of heaters, with the exception of low-temperature heat pumps and heat pump space heaters for low-temperature application</p> <table><tr><th>Seasonal space heating energy efficiency class</th><th>Seasonal space heating energy efficiency η_s in %</th></tr><tr><td>A⁺⁺⁺</td><td>$\eta_s \geq 150$</td></tr><tr><td>A⁺⁺</td><td>$125 \leq \eta_s < 150$</td></tr><tr><td>A⁺</td><td>$98 \leq \eta_s < 125$</td></tr><tr><td>A</td><td>$90 \leq \eta_s < 98$</td></tr><tr><td>B</td><td>$82 \leq \eta_s < 90$</td></tr><tr><td>C</td><td>$75 \leq \eta_s < 82$</td></tr><tr><td>D</td><td>$36 \leq \eta_s < 75$</td></tr><tr><td>E</td><td>$34 \leq \eta_s < 36$</td></tr><tr><td>F</td><td>$30 \leq \eta_s < 34$</td></tr><tr><td>G</td><td>$\eta_s < 30$</td></tr></table>	Seasonal space heating energy efficiency class	Seasonal space heating energy efficiency η_s in %	A ⁺⁺⁺	$\eta_s \geq 150$	A ⁺⁺	$125 \leq \eta_s < 150$	A ⁺	$98 \leq \eta_s < 125$	A	$90 \leq \eta_s < 98$	B	$82 \leq \eta_s < 90$	C	$75 \leq \eta_s < 82$	D	$36 \leq \eta_s < 75$	E	$34 \leq \eta_s < 36$	F	$30 \leq \eta_s < 34$	G	$\eta_s < 30$		P
Seasonal space heating energy efficiency class	Seasonal space heating energy efficiency η_s in %																								
A ⁺⁺⁺	$\eta_s \geq 150$																								
A ⁺⁺	$125 \leq \eta_s < 150$																								
A ⁺	$98 \leq \eta_s < 125$																								
A	$90 \leq \eta_s < 98$																								
B	$82 \leq \eta_s < 90$																								
C	$75 \leq \eta_s < 82$																								
D	$36 \leq \eta_s < 75$																								
E	$34 \leq \eta_s < 36$																								
F	$30 \leq \eta_s < 34$																								
G	$\eta_s < 30$																								
	<p>The seasonal space heating energy efficiency classes of a low-temperature heat pump and a heat pump space heater for low-temperature application shall be determined on the basis of its seasonal space heating energy efficiency as set out in Table 2.</p> <p>Table 2</p> <p>Seasonal space heating energy efficiency classes of low-temperature heat pumps and heat pump space heaters for low-temperature application</p> <table><tr><th>Seasonal space heating energy efficiency class</th><th>Seasonal space heating energy efficiency η_s in %</th></tr><tr><td>A⁺⁺⁺</td><td>$\eta_s \geq 175$</td></tr><tr><td>A⁺⁺</td><td>$150 \leq \eta_s < 175$</td></tr><tr><td>A⁺</td><td>$123 \leq \eta_s < 150$</td></tr><tr><td>A</td><td>$115 \leq \eta_s < 123$</td></tr><tr><td>B</td><td>$107 \leq \eta_s < 115$</td></tr><tr><td>C</td><td>$100 \leq \eta_s < 107$</td></tr><tr><td>D</td><td>$61 \leq \eta_s < 100$</td></tr><tr><td>E</td><td>$59 \leq \eta_s < 61$</td></tr><tr><td>F</td><td>$55 \leq \eta_s < 59$</td></tr><tr><td>G</td><td>$\eta_s < 55$</td></tr></table>	Seasonal space heating energy efficiency class	Seasonal space heating energy efficiency η_s in %	A ⁺⁺⁺	$\eta_s \geq 175$	A ⁺⁺	$150 \leq \eta_s < 175$	A ⁺	$123 \leq \eta_s < 150$	A	$115 \leq \eta_s < 123$	B	$107 \leq \eta_s < 115$	C	$100 \leq \eta_s < 107$	D	$61 \leq \eta_s < 100$	E	$59 \leq \eta_s < 61$	F	$55 \leq \eta_s < 59$	G	$\eta_s < 55$		P
Seasonal space heating energy efficiency class	Seasonal space heating energy efficiency η_s in %																								
A ⁺⁺⁺	$\eta_s \geq 175$																								
A ⁺⁺	$150 \leq \eta_s < 175$																								
A ⁺	$123 \leq \eta_s < 150$																								
A	$115 \leq \eta_s < 123$																								
B	$107 \leq \eta_s < 115$																								
C	$100 \leq \eta_s < 107$																								
D	$61 \leq \eta_s < 100$																								
E	$59 \leq \eta_s < 61$																								
F	$55 \leq \eta_s < 59$																								
G	$\eta_s < 55$																								
	<p>The seasonal space heating energy efficiency of a heater shall be calculated in accordance with points 3 and 4 of Annex VII, for heat pump space heaters, heat pump combination heaters and low-temperature heat pumps under average climate conditions</p>		P																						
2	WATER HEATING ENERGY EFFICIENCY CLASSES		N/A																						

Clause	Energy efficiency classes	Result - Remark	Verdict																																																																																																			
	The water heating energy efficiency class of a combination heater shall be determined on the basis of its water heating energy efficiency as set out in Table 3.		N/A																																																																																																			
	The water heating energy efficiency of a combination heater shall be calculated in accordance with point 5 of Annex VII.		N/A																																																																																																			
	<div>Table 3</div> <div>Water heating energy efficiency classes of combination heaters, categorised by declared load profiles, η_{wh} in %</div> <table><tr><th></th><th>XSS</th><th>XSS</th><th>XS</th><th>S</th><th>M</th><th>L</th><th>XL</th><th>XXL</th></tr><tr><td>A⁺⁺⁺</td><td>$\eta_{wh} \geq 62$</td><td>$\eta_{wh} \geq 62$</td><td>$\eta_{wh} \geq 69$</td><td>$\eta_{wh} \geq 90$</td><td>$\eta_{wh} \geq 163$</td><td>$\eta_{wh} \geq 188$</td><td>$\eta_{wh} \geq 200$</td><td>$\eta_{wh} \geq 213$</td></tr><tr><td>A⁺⁺</td><td>$53 \leq \eta_{wh} < 62$</td><td>$53 \leq \eta_{wh} < 62$</td><td>$61 \leq \eta_{wh} < 69$</td><td>$72 \leq \eta_{wh} < 90$</td><td>$130 \leq \eta_{wh} < 163$</td><td>$150 \leq \eta_{wh} < 188$</td><td>$160 \leq \eta_{wh} < 200$</td><td>$170 \leq \eta_{wh} < 213$</td></tr><tr><td>A⁺</td><td>$44 \leq \eta_{wh} < 53$</td><td>$44 \leq \eta_{wh} < 53$</td><td>$53 \leq \eta_{wh} < 61$</td><td>$55 \leq \eta_{wh} < 72$</td><td>$100 \leq \eta_{wh} < 130$</td><td>$115 \leq \eta_{wh} < 150$</td><td>$123 \leq \eta_{wh} < 160$</td><td>$131 \leq \eta_{wh} < 170$</td></tr><tr><td>A</td><td>$35 \leq \eta_{wh} < 44$</td><td>$35 \leq \eta_{wh} < 44$</td><td>$38 \leq \eta_{wh} < 53$</td><td>$38 \leq \eta_{wh} < 55$</td><td>$65 \leq \eta_{wh} < 100$</td><td>$75 \leq \eta_{wh} < 115$</td><td>$80 \leq \eta_{wh} < 123$</td><td>$85 \leq \eta_{wh} < 131$</td></tr><tr><td>B</td><td>$32 \leq \eta_{wh} < 35$</td><td>$32 \leq \eta_{wh} < 35$</td><td>$35 \leq \eta_{wh} < 38$</td><td>$35 \leq \eta_{wh} < 38$</td><td>$39 \leq \eta_{wh} < 65$</td><td>$50 \leq \eta_{wh} < 75$</td><td>$55 \leq \eta_{wh} < 80$</td><td>$60 \leq \eta_{wh} < 85$</td></tr><tr><td>C</td><td>$29 \leq \eta_{wh} < 32$</td><td>$29 \leq \eta_{wh} < 32$</td><td>$32 \leq \eta_{wh} < 35$</td><td>$32 \leq \eta_{wh} < 35$</td><td>$36 \leq \eta_{wh} < 39$</td><td>$37 \leq \eta_{wh} < 50$</td><td>$38 \leq \eta_{wh} < 55$</td><td>$40 \leq \eta_{wh} < 60$</td></tr><tr><td>D</td><td>$26 \leq \eta_{wh} < 29$</td><td>$26 \leq \eta_{wh} < 29$</td><td>$29 \leq \eta_{wh} < 32$</td><td>$29 \leq \eta_{wh} < 32$</td><td>$33 \leq \eta_{wh} < 36$</td><td>$34 \leq \eta_{wh} < 37$</td><td>$35 \leq \eta_{wh} < 38$</td><td>$36 \leq \eta_{wh} < 40$</td></tr><tr><td>E</td><td>$22 \leq \eta_{wh} < 26$</td><td>$23 \leq \eta_{wh} < 26$</td><td>$26 \leq \eta_{wh} < 29$</td><td>$26 \leq \eta_{wh} < 29$</td><td>$30 \leq \eta_{wh} < 33$</td><td>$30 \leq \eta_{wh} < 34$</td><td>$30 \leq \eta_{wh} < 35$</td><td>$32 \leq \eta_{wh} < 36$</td></tr><tr><td>F</td><td>$19 \leq \eta_{wh} < 22$</td><td>$20 \leq \eta_{wh} < 23$</td><td>$23 \leq \eta_{wh} < 26$</td><td>$23 \leq \eta_{wh} < 26$</td><td>$27 \leq \eta_{wh} < 30$</td><td>$27 \leq \eta_{wh} < 30$</td><td>$27 \leq \eta_{wh} < 30$</td><td>$28 \leq \eta_{wh} < 32$</td></tr><tr><td>G</td><td>$\eta_{wh} < 19$</td><td>$\eta_{wh} < 20$</td><td>$\eta_{wh} < 23$</td><td>$\eta_{wh} < 23$</td><td>$\eta_{wh} < 27$</td><td>$\eta_{wh} < 27$</td><td>$\eta_{wh} < 27$</td><td>$\eta_{wh} < 28$</td></tr></table>		XSS	XSS	XS	S	M	L	XL	XXL	A ⁺⁺⁺	$\eta_{wh} \geq 62$	$\eta_{wh} \geq 62$	$\eta_{wh} \geq 69$	$\eta_{wh} \geq 90$	$\eta_{wh} \geq 163$	$\eta_{wh} \geq 188$	$\eta_{wh} \geq 200$	$\eta_{wh} \geq 213$	A ⁺⁺	$53 \leq \eta_{wh} < 62$	$53 \leq \eta_{wh} < 62$	$61 \leq \eta_{wh} < 69$	$72 \leq \eta_{wh} < 90$	$130 \leq \eta_{wh} < 163$	$150 \leq \eta_{wh} < 188$	$160 \leq \eta_{wh} < 200$	$170 \leq \eta_{wh} < 213$	A ⁺	$44 \leq \eta_{wh} < 53$	$44 \leq \eta_{wh} < 53$	$53 \leq \eta_{wh} < 61$	$55 \leq \eta_{wh} < 72$	$100 \leq \eta_{wh} < 130$	$115 \leq \eta_{wh} < 150$	$123 \leq \eta_{wh} < 160$	$131 \leq \eta_{wh} < 170$	A	$35 \leq \eta_{wh} < 44$	$35 \leq \eta_{wh} < 44$	$38 \leq \eta_{wh} < 53$	$38 \leq \eta_{wh} < 55$	$65 \leq \eta_{wh} < 100$	$75 \leq \eta_{wh} < 115$	$80 \leq \eta_{wh} < 123$	$85 \leq \eta_{wh} < 131$	B	$32 \leq \eta_{wh} < 35$	$32 \leq \eta_{wh} < 35$	$35 \leq \eta_{wh} < 38$	$35 \leq \eta_{wh} < 38$	$39 \leq \eta_{wh} < 65$	$50 \leq \eta_{wh} < 75$	$55 \leq \eta_{wh} < 80$	$60 \leq \eta_{wh} < 85$	C	$29 \leq \eta_{wh} < 32$	$29 \leq \eta_{wh} < 32$	$32 \leq \eta_{wh} < 35$	$32 \leq \eta_{wh} < 35$	$36 \leq \eta_{wh} < 39$	$37 \leq \eta_{wh} < 50$	$38 \leq \eta_{wh} < 55$	$40 \leq \eta_{wh} < 60$	D	$26 \leq \eta_{wh} < 29$	$26 \leq \eta_{wh} < 29$	$29 \leq \eta_{wh} < 32$	$29 \leq \eta_{wh} < 32$	$33 \leq \eta_{wh} < 36$	$34 \leq \eta_{wh} < 37$	$35 \leq \eta_{wh} < 38$	$36 \leq \eta_{wh} < 40$	E	$22 \leq \eta_{wh} < 26$	$23 \leq \eta_{wh} < 26$	$26 \leq \eta_{wh} < 29$	$26 \leq \eta_{wh} < 29$	$30 \leq \eta_{wh} < 33$	$30 \leq \eta_{wh} < 34$	$30 \leq \eta_{wh} < 35$	$32 \leq \eta_{wh} < 36$	F	$19 \leq \eta_{wh} < 22$	$20 \leq \eta_{wh} < 23$	$23 \leq \eta_{wh} < 26$	$23 \leq \eta_{wh} < 26$	$27 \leq \eta_{wh} < 30$	$27 \leq \eta_{wh} < 30$	$27 \leq \eta_{wh} < 30$	$28 \leq \eta_{wh} < 32$	G	$\eta_{wh} < 19$	$\eta_{wh} < 20$	$\eta_{wh} < 23$	$\eta_{wh} < 23$	$\eta_{wh} < 27$	$\eta_{wh} < 27$	$\eta_{wh} < 27$	$\eta_{wh} < 28$		N/A
	XSS	XSS	XS	S	M	L	XL	XXL																																																																																														
A ⁺⁺⁺	$\eta_{wh} \geq 62$	$\eta_{wh} \geq 62$	$\eta_{wh} \geq 69$	$\eta_{wh} \geq 90$	$\eta_{wh} \geq 163$	$\eta_{wh} \geq 188$	$\eta_{wh} \geq 200$	$\eta_{wh} \geq 213$																																																																																														
A ⁺⁺	$53 \leq \eta_{wh} < 62$	$53 \leq \eta_{wh} < 62$	$61 \leq \eta_{wh} < 69$	$72 \leq \eta_{wh} < 90$	$130 \leq \eta_{wh} < 163$	$150 \leq \eta_{wh} < 188$	$160 \leq \eta_{wh} < 200$	$170 \leq \eta_{wh} < 213$																																																																																														
A ⁺	$44 \leq \eta_{wh} < 53$	$44 \leq \eta_{wh} < 53$	$53 \leq \eta_{wh} < 61$	$55 \leq \eta_{wh} < 72$	$100 \leq \eta_{wh} < 130$	$115 \leq \eta_{wh} < 150$	$123 \leq \eta_{wh} < 160$	$131 \leq \eta_{wh} < 170$																																																																																														
A	$35 \leq \eta_{wh} < 44$	$35 \leq \eta_{wh} < 44$	$38 \leq \eta_{wh} < 53$	$38 \leq \eta_{wh} < 55$	$65 \leq \eta_{wh} < 100$	$75 \leq \eta_{wh} < 115$	$80 \leq \eta_{wh} < 123$	$85 \leq \eta_{wh} < 131$																																																																																														
B	$32 \leq \eta_{wh} < 35$	$32 \leq \eta_{wh} < 35$	$35 \leq \eta_{wh} < 38$	$35 \leq \eta_{wh} < 38$	$39 \leq \eta_{wh} < 65$	$50 \leq \eta_{wh} < 75$	$55 \leq \eta_{wh} < 80$	$60 \leq \eta_{wh} < 85$																																																																																														
C	$29 \leq \eta_{wh} < 32$	$29 \leq \eta_{wh} < 32$	$32 \leq \eta_{wh} < 35$	$32 \leq \eta_{wh} < 35$	$36 \leq \eta_{wh} < 39$	$37 \leq \eta_{wh} < 50$	$38 \leq \eta_{wh} < 55$	$40 \leq \eta_{wh} < 60$																																																																																														
D	$26 \leq \eta_{wh} < 29$	$26 \leq \eta_{wh} < 29$	$29 \leq \eta_{wh} < 32$	$29 \leq \eta_{wh} < 32$	$33 \leq \eta_{wh} < 36$	$34 \leq \eta_{wh} < 37$	$35 \leq \eta_{wh} < 38$	$36 \leq \eta_{wh} < 40$																																																																																														
E	$22 \leq \eta_{wh} < 26$	$23 \leq \eta_{wh} < 26$	$26 \leq \eta_{wh} < 29$	$26 \leq \eta_{wh} < 29$	$30 \leq \eta_{wh} < 33$	$30 \leq \eta_{wh} < 34$	$30 \leq \eta_{wh} < 35$	$32 \leq \eta_{wh} < 36$																																																																																														
F	$19 \leq \eta_{wh} < 22$	$20 \leq \eta_{wh} < 23$	$23 \leq \eta_{wh} < 26$	$23 \leq \eta_{wh} < 26$	$27 \leq \eta_{wh} < 30$	$27 \leq \eta_{wh} < 30$	$27 \leq \eta_{wh} < 30$	$28 \leq \eta_{wh} < 32$																																																																																														
G	$\eta_{wh} < 19$	$\eta_{wh} < 20$	$\eta_{wh} < 23$	$\eta_{wh} < 23$	$\eta_{wh} < 27$	$\eta_{wh} < 27$	$\eta_{wh} < 27$	$\eta_{wh} < 28$																																																																																														
3	ENERGY EFFICIENCY CLASSES OF SOLAR HOT WATER STORAGE TANKS, IF (PART OF) A SOLAR DEVICE		N/A																																																																																																			
	The energy efficiency class of a solar hot water storage tank, if (part of) a solar device, shall be determined on the basis of its standing loss as set out in Table 4. <div>Table 4</div> <div>Energy efficiency classes of solar hot water storage tanks, if (part of) a solar device</div> <table><tr><th>Energy efficiency class</th><th>Standing loss S in Watts, with storage volume V in litres</th></tr><tr><td>A+</td><td>$S < 5,5 + 3,16 \cdot V^{0,4}$</td></tr><tr><td>A</td><td>$5,5 + 3,16 \cdot V^{0,4} \leq S < 8,5 + 4,25 \cdot V^{0,4}$</td></tr><tr><td>B</td><td>$8,5 + 4,25 \cdot V^{0,4} \leq S < 12 + 5,93 \cdot V^{0,4}$</td></tr><tr><td>C</td><td>$12 + 5,93 \cdot V^{0,4} \leq S < 16,66 + 8,33 \cdot V^{0,4}$</td></tr><tr><td>D</td><td>$16,66 + 8,33 \cdot V^{0,4} \leq S < 21 + 10,33 \cdot V^{0,4}$</td></tr><tr><td>E</td><td>$21 + 10,33 \cdot V^{0,4} \leq S < 26 + 13,66 \cdot V^{0,4}$</td></tr><tr><td>F</td><td>$26 + 13,66 \cdot V^{0,4} \leq S < 31 + 16,66 \cdot V^{0,4}$</td></tr><tr><td>G</td><td>$S \geq 31 + 16,66 \cdot V^{0,4}$</td></tr></table>	Energy efficiency class	Standing loss S in Watts, with storage volume V in litres	A+	$S < 5,5 + 3,16 \cdot V^{0,4}$	A	$5,5 + 3,16 \cdot V^{0,4} \leq S < 8,5 + 4,25 \cdot V^{0,4}$	B	$8,5 + 4,25 \cdot V^{0,4} \leq S < 12 + 5,93 \cdot V^{0,4}$	C	$12 + 5,93 \cdot V^{0,4} \leq S < 16,66 + 8,33 \cdot V^{0,4}$	D	$16,66 + 8,33 \cdot V^{0,4} \leq S < 21 + 10,33 \cdot V^{0,4}$	E	$21 + 10,33 \cdot V^{0,4} \leq S < 26 + 13,66 \cdot V^{0,4}$	F	$26 + 13,66 \cdot V^{0,4} \leq S < 31 + 16,66 \cdot V^{0,4}$	G	$S \geq 31 + 16,66 \cdot V^{0,4}$		N/A																																																																																	
Energy efficiency class	Standing loss S in Watts, with storage volume V in litres																																																																																																					
A+	$S < 5,5 + 3,16 \cdot V^{0,4}$																																																																																																					
A	$5,5 + 3,16 \cdot V^{0,4} \leq S < 8,5 + 4,25 \cdot V^{0,4}$																																																																																																					
B	$8,5 + 4,25 \cdot V^{0,4} \leq S < 12 + 5,93 \cdot V^{0,4}$																																																																																																					
C	$12 + 5,93 \cdot V^{0,4} \leq S < 16,66 + 8,33 \cdot V^{0,4}$																																																																																																					
D	$16,66 + 8,33 \cdot V^{0,4} \leq S < 21 + 10,33 \cdot V^{0,4}$																																																																																																					
E	$21 + 10,33 \cdot V^{0,4} \leq S < 26 + 13,66 \cdot V^{0,4}$																																																																																																					
F	$26 + 13,66 \cdot V^{0,4} \leq S < 31 + 16,66 \cdot V^{0,4}$																																																																																																					
G	$S \geq 31 + 16,66 \cdot V^{0,4}$																																																																																																					

Table for heating test data - Low temperature application (Average)

Test	-	A	B	C	D	E	F
General test conditions/part load	unit	A-7/W34 (88%)	A2/W30 (54%)	A7/W27 (35%)	A12/W24 (15%)	A-10/W35 (100%)	A-7/W34 (88%)
Barometric	KPa	101.30	101.30	101.30	101.30	101.30	101.30
Voltage	V	400.0	400.0	400.0	400.0	400.0	400.0
Current input	A	10.37	5.00	2.95	2.02	12.53	10.37
Power input	kW	5.818	2.481	1.309	0.815	7.246	5.818
Test conditions indoor unit							
Inlet water temperature	°C	29.4	27.4	25.1	21.8	30.0	29.4
Outlet water temperature	°C	34.0	30.2	27.2	23.8	34.9	34.0
Water flow	M ³ /h	3.6	3.6	3.6	3.6	3.6	3.6
Test conditions outdoor unit							
Air inlet temperature, DB	°C	-6.99	1.07	7.09	11.96	-9.99	-6.99
Air outlet temperature, WD	°C	-7.53	0.96	6.16	11.26	-10.62	-7.53
Heating capacity	kW	19.480	11.441	8.974	8.273	20.542	19.480
Co-efficiency of performance	-	3.36	4.61	6.86	10.15	2.83	3.36
Compressor frequency	Hz	70	38	25	20	86	70

SCOP calculation (Average):

	Outdoor air °C	Indoor outlet water temper °C	Part Load Ratio, %	Part Load kW	Measured heating capacity kW	Measured input Power kW	Measured COP	Cd	CR	COP _{PL} (COP bin (T _j))
A	-7	34	88	19.480	19.480	5.818	3.36	0.90	1.00	3.36
B	2	30	54	11.857	11.441	2.481	4.61	0.90	1.00	4.61
C	7	27	35	7.623	8.974	1.309	6.86	0.90	0.85	6.86
D	12	24	15	3.388	8.273	0.815	10.15	0.90	0.41	10.15
E	-10	35	100	22.021	20.542	7.246	2.83	0.90	1.00	2.83
F	-7	34	88	19.480	19.480	5.818	3.36	0.90	1.00	3.36

	Power W	Hours	P × H
Thermostat Off	48.7	178	8.67
Standby	9.0	0	0.00
CK	50.0	3850	192.50
Off	9.0	3672	33.05

items	value	unit
P _{designh}	22.021	kW
H _{he}	2066	h
Q _h	45495	kWh
Q _{he}	9328	kWh
SCOP	4.877	-
CC	2.5	-
η	192%	-
Energy efficiency class	A+++	-

Table 2

Seasonal space heating energy efficiency classes of low-temperature heat pumps and heat pump space heaters for low-temperature application

Seasonal space heating energy efficiency class	Seasonal space heating energy efficiency η_s in %
A ⁺⁺⁺	$\eta_s \geq 175$
A ⁺⁺	$150 \leq \eta_s < 175$
A ⁺	$123 \leq \eta_s < 150$
A	$115 \leq \eta_s < 123$
B	$107 \leq \eta_s < 115$
C	$100 \leq \eta_s < 107$
D	$61 \leq \eta_s < 100$
E	$59 \leq \eta_s < 61$
F	$55 \leq \eta_s < 59$
G	$\eta_s < 55$

Table for heating test data - Medium temperature application (Average)

EN 14825 heat pump air to water

Test	-	A	B	C	D	E	F
General test conditions/part load	unit	A-7/W52 (88%)	A2/W42 (54%)	A7/W36 (35%)	A12/W30 (15%)	A-10/W55 (100%)	A-7/W52 (88%)
Barometric	KPa	101.30	101.30	101.30	101.30	101.30	101.30
Voltage	V	400.0	400.0	400.0	400.0	400.0	400.0
Current input	A	13.05	6.27	3.73	2.52	15.87	13.05
Power input	kW	7.593	3.195	1.722	1.064	9.420	7.593
Test conditions indoor unit							
Inlet water temperature	°C	44.5	37.7	33.0	27.0	46.9	44.5
Outlet water temperature	°C	51.9	42.1	36.4	30.1	54.9	51.9
Water flow	M ³ /h	2.2	2.2	2.2	2.2	2.2	2.2
Test conditions outdoor unit							
Air inlet temperature, DB	°C	-7.04	2.08	6.88	12.12	-10.47	-7.04
Air outlet temperature, WD	°C	-7.89	1.06	5.93	11.03	-10.98	-7.89
Heating capacity	kW	18.591	11.068	8.436	7.748	19.911	18.591
Co-efficiency of performance	-	2.45	3.46	4.90	7.28	2.11	2.45
Compressor frequency	Hz	65	38	25	20	78	65

SCOP calculation (Average):

	Outdoor air °C	Indoor outlet water temper °C	Part Load Ratio, %	Part Load kW	Measured heating capacity kW	Measured input Power kW	Measured COP	Cd	CR	COP _{PL} (COP bin (T _j))
A	-7	52	88	18.590	18.591	7.593	2.45	0.90	1.00	2.45
B	2	42	54	11.316	11.068	3.195	3.46	0.90	1.02	3.46
C	7	36	35	7.274	8.436	1.722	4.90	0.90	0.86	4.90
D	12	30	15	3.233	7.748	1.064	7.28	0.90	0.42	7.28
E	-10	55	100	21.015	19.911	9.420	2.11	0.90	1.00	2.11
F	-7	52	88	18.590	18.591	7.593	2.45	0.90	1.00	2.45

	Power W	Hours	P × H
Thermostat Off	48.7	178	8.67
Standby	9.0	0	0.00
CK	50.0	3850	192.50
Off	9.0	3672	33.05

items	value	unit
P _{designh}	21.016	kW
H _{he}	2066	h
Q _h	43419	kWh
Q _{he}	12923	kWh
SCOP	3.360	-
CC	2.5	-
η	131%	-
Energy efficiency class	A++	-

Table 1

Seasonal space heating energy efficiency classes of heaters, with the exception of low-temperature heat pumps and heat pump space heaters for low-temperature application

Seasonal space heating energy efficiency class	Seasonal space heating energy efficiency η_s in %
A ⁺⁺⁺	$\eta_s \geq 150$
A ⁺⁺	$125 \leq \eta_s < 150$
A ⁺	$98 \leq \eta_s < 125$
A	$90 \leq \eta_s < 98$
B	$82 \leq \eta_s < 90$
C	$75 \leq \eta_s < 82$
D	$36 \leq \eta_s < 75$
E	$34 \leq \eta_s < 36$
F	$30 \leq \eta_s < 34$
G	$\eta_s < 30$

Photos:

Overview



Compressor

End of report